



Enriching Lives

CAST STEEL GATE VALVES

AS PER API : 600



KIRLOSKAR BROTHERS LIMITED

CAST STEEL GATE VALVES

Widely accepted by Water supply authorities, National Thermal Power Corporation, Nuclear Power Corporation and Industrial users. Designed as per latest editions of API : 600 specifications.

Application

- Widely used for handling Naphtha and Naphtha derivatives in Oil Refineries, Petroleum and Chemical Industries.
- Also these valves can be used for handling water, steam, air, gas or liquid with corrosive properties.
- Intended to be either fully open or fully closed condition.

Salient Constructional features:


- **Body:**
 - Valve body is designed to provide maximum stream line flow to minimize pressure drop as well as corrosive and erosive effects.
 - Adequate wall thickness and sturdiness to avoid distortion caused by fluid pressure under operating conditions and also to withstand undue stresses on any working parts avoiding torsion due to undue strains.
 - Body is strong enough to withstand specified conditions of pressure and temperature.
- **Bonnet**
 - Bonnet is designed in the form of circular or rectangular sections as per the requirements of API 600 standard.
 - The valve body and bonnet flanged joints and, are fastened by adequate number of studs and nuts. Bonnets are equipped with gasket which ensures a perfect sealing.
 - Bonnets are designed to withstand same pressure as that of body.
- **Stem**
 - Stem is outside screw, rising type with trapezoidal threads for smoother operation.
 - The stem collar is formed by forging from wrought material to ensure trouble free operation.
 - Stem is machined to high finish, with accurately cut threads, minimizing packing friction and operating torque.
 - Stem is provided with conical back seat surface to seat against bonnet back seat surface for re-packing of valve with the valve full open position.
- **Back Seat Bush**
 - Bush is screwed on the bonnet. It has conical seating surface to meet corresponding seating surface of stem.
- **Wedge**
 - Gate valves are provided with flexi gate wedge tapered on both sides, provided with deep groove inside lugs to minimize chatter when partly open.
 - All the wedges are furnished with proper guides, reducing unnecessary wear on seating surfaces due to the movement of wedge.
 - The seating surfaces of the wedge are precisely machined to achieve mirror finish.
- **Body Seat Ring**
 - Body seat rings are screwed / welded to the body. The faces of rings are precisely machined to achieve mirror finish.
- **Gasket**
 - Gasket is selected to match its suitability for handling particular fluid under specified conditions.
- **Handwheel**
 - Sturdy, specially designed for firm grip.

Material Of Construction


Scope	Body, Bonnet	Body (Seat) Ring	Spindle/ Back seat Bush	Wedge	Hand Wheel	Body / Bonnet Fasteners	Gasket
Standard	CS ASTM A 216 Gr.WCB	CS ASTM A515 Gr.70 +13%Cr. H.F.	SS AISI 410	CS ASTM A 216 Gr.WCB +13%Cr. H.F.	SG IRON	ASTM A 193 Gr.B7 / A194 Gr.2H	Spiral wound SS304/ 316 + Graphoil
Optional	SS ASTM A 351 Gr.CF8/ Gr.CF8M	SS ASTM A 351 Gr.CF8 / Gr.CF8M (Intergral)	SS AISI 304 SS AISI 316	SS AISI 304 SS AISI 316	CS ASTM A 216 Gr.WCB/ CARBON STEEL		

Note : *For special material of construction ,Contact Design Office
* H.F. : Hard Face.


General Outline Drawing Class 150

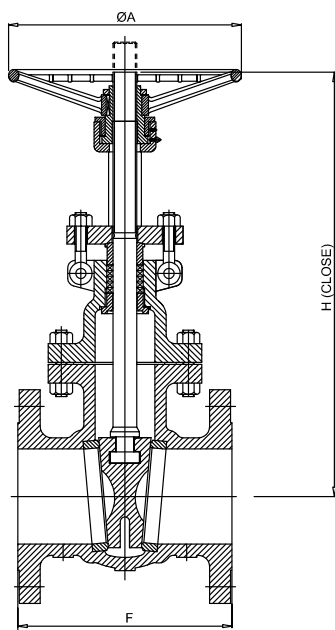

Size Range
50 mm to 200 mm

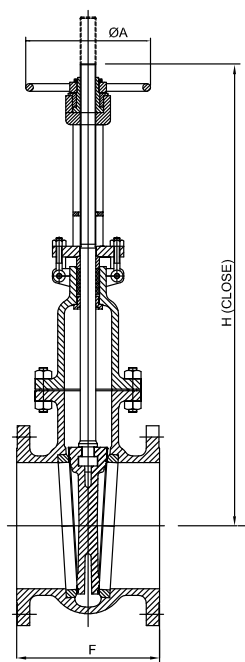

Size Range
250 mm and 300 mm

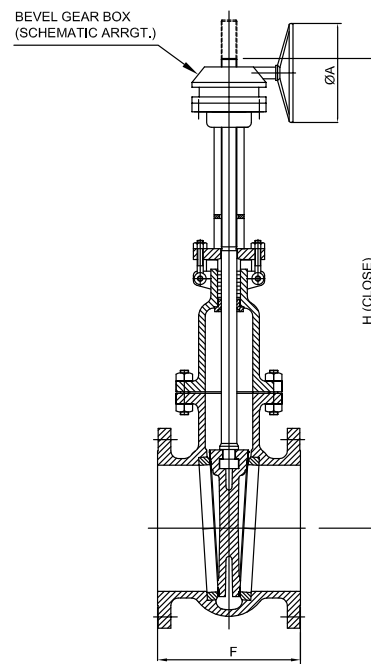


Size Range
350 mm to 600 mm

General Outline Dimensions Class 150

Valve Size	50	65	80	100	125	150	200	250	300	350	400	450	500	550	600
F	178	190.5	203.2	228.6	254	266.7	292	330	356	381	406	432	457	508	508
H Approx	325	376	395	435	582	612	772	940	1030	1335	1520	1625	1780	1986	2100
ØA	200	200	250	250	300	300	350	400	450	•	•	•	•	•	•

Note: * All Dimensions are in 'mm' otherwise stated.
• Depend on Make and Model of Gear Box.

General Outline Drawing
Class 300

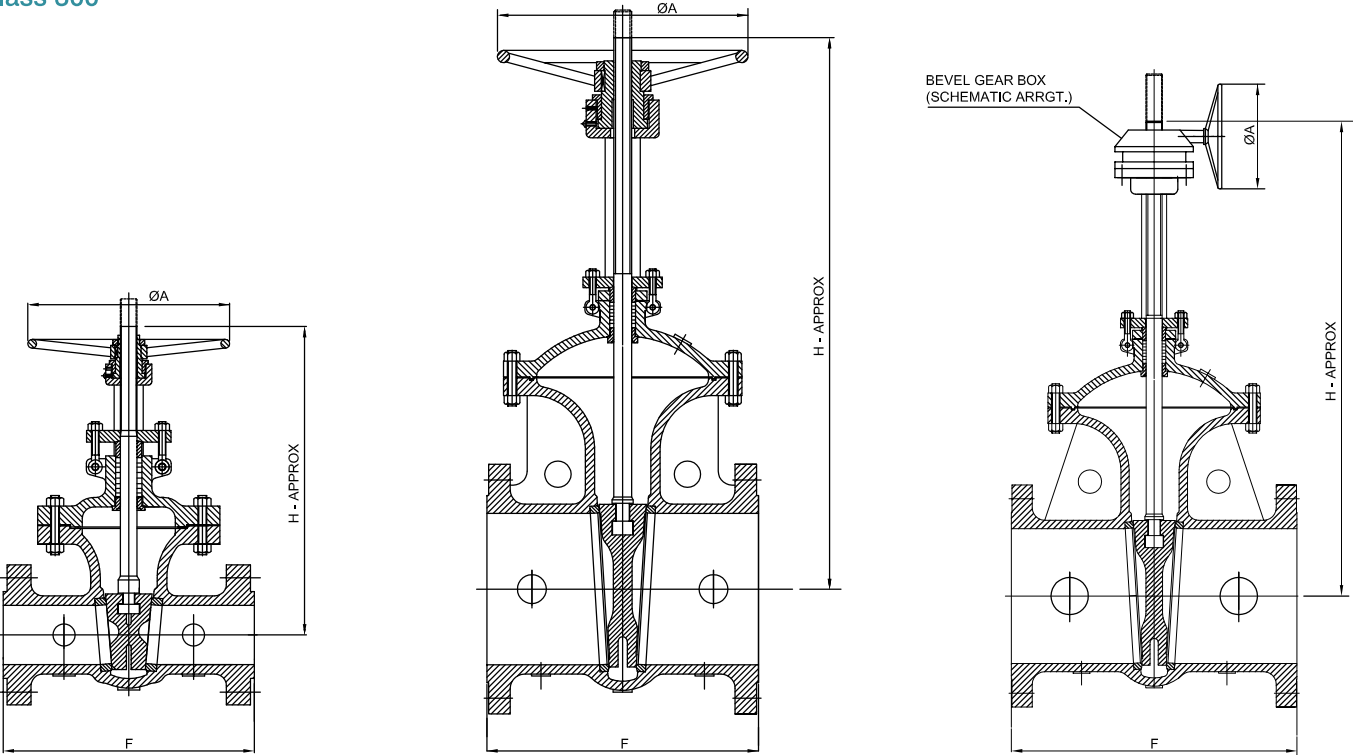

Size Range
50 mm to 200 mm

Size Range
250 mm

Size Range
300 mm to 600 mm


General Outline Dimensions
Class 300

Valve Size	50	65	80	100	125	150	200	250	300	350	400	450	500	600
F	216	241.3	283	305	381	403	419	457.2	502	762	838	914.4	990.6	1143
H Approx	373	390	400	485	670	705	880	960	1150	1325	1550	1685	1680	2070
ØA	200	250	250	250	300	300	450	500	•	•	•	•	•	•


Note: * All Dimensions are in 'mm' otherwise stated.
• Depend on Make and Model of Gear Box.

General Outline Drawing


Class 600

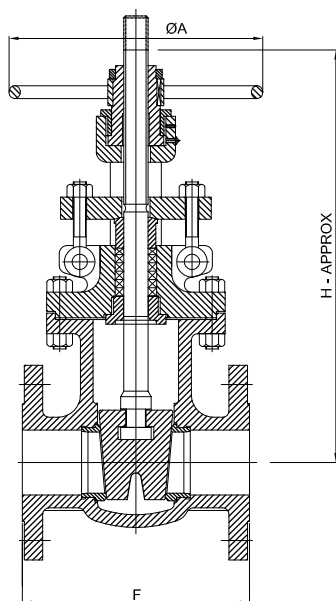


Size Range
50 mm

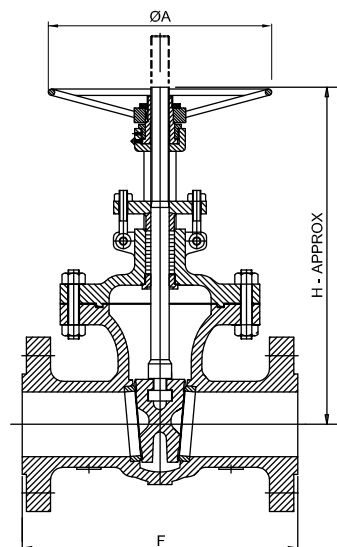

Size Range
65 mm to 150 mm

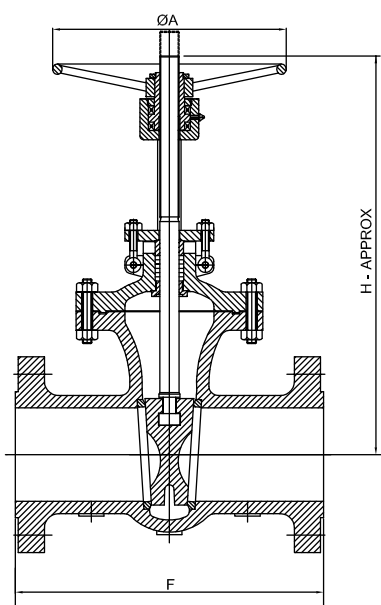

Size Range
200 mm

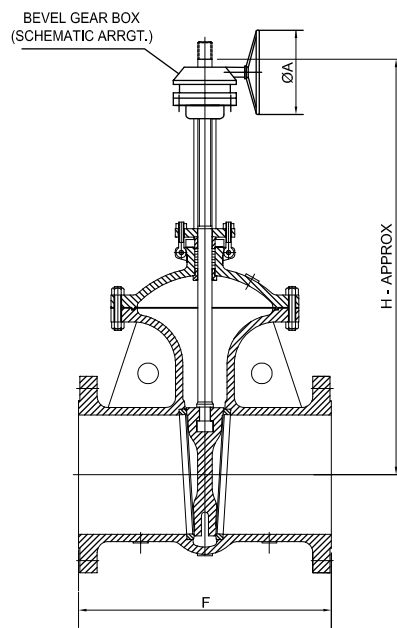

Size Range
250 mm to 600 mm

General Outline Dimensions

Class 600

Valve Size	50	65	80	100	125	150	200	250	300	350	400	450	500	600
F	292.1	330.2	355.6	432	508	559	660	787.4	838.2	889	990.6	1092.2	1193.8	1397
H Approx	370	450	480	530	635	635	870	1130	1320	1390	1800	1950	2055	2300
ØA	250	250	250	350	500	500	500	•	•	•	•	•	•	•

Note: * All Dimensions are in 'mm' otherwise stated.

- Depend on Make and Model of Gear Box.

Accessories:

- By Pass Arrangement.
- Electric Actuator.
- Closed Bevel Gear Box Arrangement.
- Locking Arrangement.
- Chain & Chain Wheel Arrangement.
- Extension Shafting and Head Stock Arrangement.
- BWE Connection.
- Companion Flanges and Fasteners.

Technical Specification

Design and Manufacturing Standard	API 600
Testing Standard	API 598
Size Range	50mm - 600mm
Pressure Rating	CL-150 / 300 / 600.
Pressure temperature Ratings	CL-150 / 300 / 600
Face-to-Face / End-to-End Dimension	ASME B16.10

Note: *For Higher Pressure Rating contact Design Office.

End Connection

Scope	Flange Drilling Standard
Standard Supply	ANSI B 16.5 CL-150 / 300 / 600

Note: * For valves in sizes larger than 24" (600 mm), the flange drilling shall be as per ASME B16.47

* Other flange drilling standards are available as per requirement.

Hydrostatic test Pressures :

Pressure Rating	Hydrostatic Body (Kg/Cm2)	Hydrostatic Seat (Kg/Cm2)	Air Seat (Kg/Cm2)
Class- 150	30	22	7
Class- 300	79	58	7
Class- 600	158	116	7

Optional : *For Higher Pressure ratings can be supplied on case to case bases.

OUR GLOBAL PRESENCE



ABOUT KBL

Kirloskar Brothers Limited (KBL) is a world class pump manufacturing company with expertise in engineering and manufacture of systems for fluid management. Established in 1888 and incorporated in 1920, KBL is the flagship company of the \$ 2.1 billion Kirloskar Group. As the market leader in fluid management, KBL provides complete fluid management solutions for large infrastructure projects in the areas of water supply, power plants, irrigation, oil & gas and marine & defence. We engineer and manufacture industrial, agriculture & domestic pumps, valves and hydro turbines.

In 2003 KBL acquired SPP Pumps, United Kingdom and established SPP Inc., Atlanta, USA, as a wholly owned subsidiary of SPP, UK and expanded its international presence. In 2007, Kirloskar Brothers International B.V., The Netherlands and Kirloskar Brothers (Thailand) Ltd, a wholly owned subsidiary in Thailand were incorporated. In 2008, KBL incorporated Kirloskar Brothers Europe BV (Kirloskar Pompen BV since June 2014), a joint venture between Kirloskar Brothers International BV and Industrial Pump Group, The Netherlands. In 2010 KBL further consolidated its global position by acquiring Braybar Pumps, South Africa. SPP MENA was established in Egypt in 2012. KBL has a joint venture company with Ebara Corporation, Japan since 1988 for the manufacture of API 610 standard pumps. Kirloskar Corrocoat Private Limited is joint venture cooperation with Corrocoat Ltd., UK since 2006. KBL acquired The Kolhapur Steel Limited in 2007 and Hematic Motors in 2010. In 2014, KBL acquired SyncroFlo. Inc, the largest independent fabricator of commercial and municipal domestic water.

KBL has eight manufacturing facilities in India at Kirloskarvadi, Dewas, Kondhapuri, Shirval, Sanand, Kaniyur, Kolhapur and Karad. In addition, KBL has seven manufacturing and packaging facilities in Egypt, South Africa, Thailand, The Netherlands, United Arab Emirates, United Kingdom and United States of America. KBL has 12,700 channel partners in India and 80 overseas and is supported by best in class network of Authorised Centres and Authorised Refurbishment Centres across the country.

All plants of KBL are ISO 9001, ISO 14001 and OHSAS 18001 standards certified. They apply Total Quality Management tools using European Foundation for Quality Management (EFQM) model. The Kirloskarvadi plant of KBL is a state of art integrated manufacturing facility having one of Asia's largest hydraulic research centre with testing facility up to 5000 kW and 50,000 m³/hour.

KBL is the only pump manufacturing company in India and ninth in the world to be accredited with the N and NPT certification by American Society of Mechanical Engineers (ASME).



Scan this code with your smart phone
to know more about KBL

As we are constantly endeavouring to improve the performance of our products / equipment, we reserve the right to make alterations from time to time and as such our products / equipments may differ from that detailed in this publication. For latest information you may get in touch with our Regional Sales Offices.



Enriching Lives

KIRLOSKAR BROTHERS LIMITED

A Kirloskar Group Company

GLOBAL HEADQUARTERS :

"YAMUNA", Survey No. 98 (3 to 7), Baner,
Pune - 411045, INDIA
Tel.: +91-20 27214444 Fax : +91-20 27211117
email : kblin@kbl.co.in Website : www.kirloskarpumps.com

REGISTERED OFFICE :

Udyog Bhavan, Tilak Road,
Pune - 411002, INDIA
Tel.: +91-20 24440770 Fax: +91-20 24440156

WORKS :

Kondhapuri, Gat # 252/2 + 254/2, Tal. : Shirur,
District Pune - 412208, INDIA
Tel.: 02137-240022 / 240044

Our Group Companies



KIRLOSKAR BROTHERS LIMITED
CSGT-08-2014-00

Pumps | Valves | Hydro Turbines | Turnkey Projects

Water Resource Management | Irrigation | Power | Industry | Gas, Oil & Defence | Building & Construction | Distribution | Customer Service & Spares